

SNAP ACTION SWITCH

Features

- Auxiliary Actuators for type VS and VT Micro Switches.
- Metal and Plastic material are both available.
- Many options of the button are available.
- Easy to install.



Specifications

Item	Standard
Rating	10A 125VAC /15 250 VAC UL1054
Conduit Resistance	50mΩ max. (Initial)
Dielectric Resistance	AC 1000V (50/60 Hz for 1minute)
Insulation Resistance	100MΩ, min (at 500 VDC)
Electrically Life	100,000 Cycle min
Mechanically Life	1,000,000 Cycle min

Product selection

VAQ-4 - - - -

1 2 3 4 5

1. ACTUATOR TYPE

VAQ-4: Nylon(φ 13mm)

VAQ-5: Nylon(φ 19mm)

AB5151: Metal(φ 13mm)

AB6161: Metal(φ 19mm)

2. BUTTON COLOR

R: Red

Y: Yellow

G: Green

3. CURRENT RATING

10: 10A 250VAC VS SERIES(S)

16: 16A 250VAC VT SERIES(C)

_: WITHOUT (S)

4. CONTACT

1: 1 NC & 1NO(S)

2: NC(C)

3: NO(C)

5. TERMINAL

VS SERIES (10A)

A: Solder(C)

B: Screw(C)

C: 250 Quick Connect (C)

C2: 187 Quick Connect (S)

VT SERIES(16A)

A: Solder (C)

C: 250 Quick Connect (C)

C2: 187 Quick Connect (C)

* (S)=Standard (C) =Customization

HIGHLY

B21

Design, specifications are subject to change without notice.

SNAP ACTION SWITCH


Dimensions

Unit: mm


Item No.

Dimensions


VAQ-4




Assembly VS Series switch




ZVAQ-5




Assembly VS Series switch




AB5151




Assembly VS Series switch

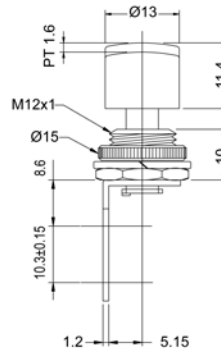

AB6161



Assembly VS Series switch



HIGHLY

B22

Design, specifications are subject to change without notice.